

For a healthier, more beautiful lawn, rake at least once a year *



Blue Bird

LAWN COMBER



Many various approaches have been made to solve the problem of disease-ridden lawns. The most common problems arise from an accumulation of grass clippings, thatch build-up, or the rapid growing, choking effect of some grasses. The first step to a healthier, more beautiful lawn, therefore, is removal of this accumulation or thatch and the thinning of some lawns. This is a back-breaking chore with a hand rake! But . . . at last a machine is available to do this work for you, cleanly . . . and with a minimum of effort!

Remove thatch, clipping accumulation; let fertilizer, sun and moisture get to the soil . . . the easy way.




You, too, will be amazed at the amount of choking, disease-laden thatch in the average lawn.

The EXACT height you want . . . with your fingertips. Both front wheels automatically balanced.



Turf authorities agree: "The first step to an award-winning lawn is removing all thatch and debris to allow fertilizers and control chemicals to be used to their maximum effectiveness. In many cases a lawn must be thinned to stimulate a more vigorous and healthy root system."




RENTAL EQUIPMENT
MANUFACTURING CO.

home of the

Blue Bird

LAWN COMBER

1924 SOUTH NAVAJO ST. DENVER, COLO.




SPECIFICATIONS

CHOOSE FROM THREE MODELS

- MODEL C-35 3.5 hp. #494-1300 Clinton cast iron engine
 MODEL C-45 4.5 hp. #498-1300 Clinton cast iron engine
 MODEL B-60 6 hp. #142301 Briggs & Stratton Aluminum engine

Height Adjustment—Single Screw Crank, adjusts and balances both front wheels automatically; Suspension—Four Wheels, three point suspension keeps the rotor level even in rough terrain; Combing Width—18"; Housing—All Welded Steel, with 10 ga. steel top; Rotor—Cast Steel; Rotor Bearings—Fafnir, sealed, self-aligning; Blades—52 ea., $\frac{1}{8}$ x 4", case-hardened steel; Wheels—Ball Bearing; Tires—Semi-pneumatic, front 8x1.75, rear 10x2.50; Handle—Standard Wall Pipe; Shipping Weight—135 Pounds.

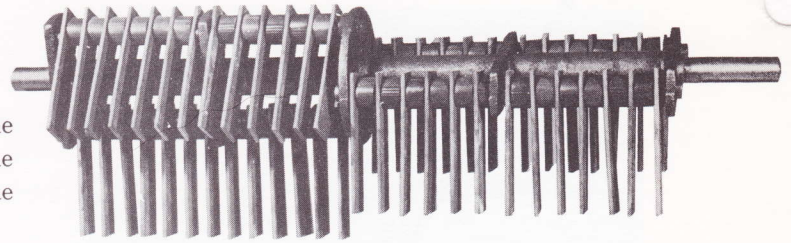

here's the heart of the Blue Bird


A multi-blade rotor of free-swinging blades. No metal fatigue. Unconditionally guaranteed against breakage for one full year from purchase.

NEW!



Blue Bird ROTARY MOWER


The "Blue Bird" Rotary Mower was built to specifications submitted by more than 50 rental store operators from coast to coast. The removable front shrouds allow it to be a rugged mower for all weeds and, with the shrouds on, a fine lawn mower. Easily fits into the trunk of all but the smallest cars.

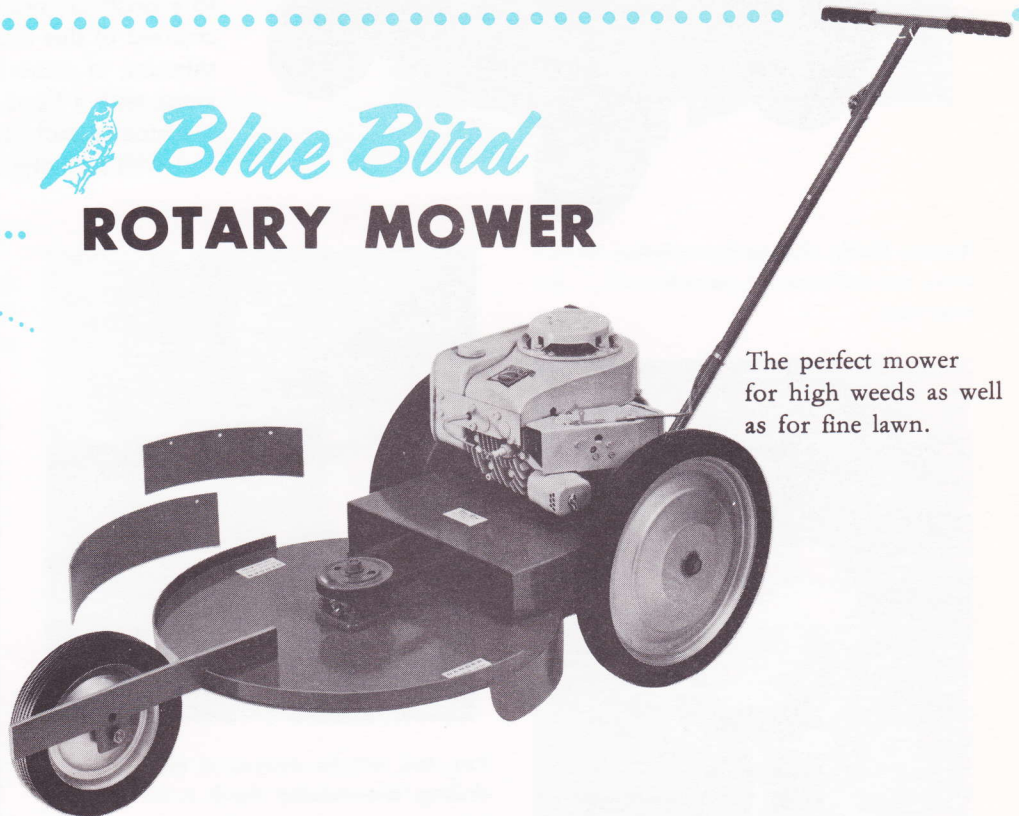

The perfect mower for high weeds as well as for fine lawn.

SPECIFICATIONS

Cutting Width—23½"; Housing—All Welded, 10 ga. steel; Wheels—Ball Bearing; Tires—Semi-pneumatic, front 10 x 1.75, rear 16 x 1.75; Bearings—Fafnir, flange type, self-aligning; Spindle Shaft—6" Long, completely supported by bearings; Blade—¼ x 2½" of special alloy steel, a cutting edge on both sides for double duty; Engine—4.5 hp. Clinton, solid cast iron, vertical shaft; Cutting Height—2" or 3"; Shipping Weight—135 Pounds.



RENTAL EQUIPMENT
MANUFACTURING CO.

home of the

Blue Bird **LAWN COMBER**

1924 SOUTH NAVAJO ST. DENVER, COLO.


Printed in U.S.A.

This is
the ONE!

a mower that's REALLY built to take it!

Blue Bird converta-mower


The CONVERTIBLE rotary mower built by the firm that sells ONLY to the RENTAL and LANDSCAPE industry. Front shroud DOWN...an excellent lawn mower; Shroud UP...a rugged weed mower. And it converts in an instant!

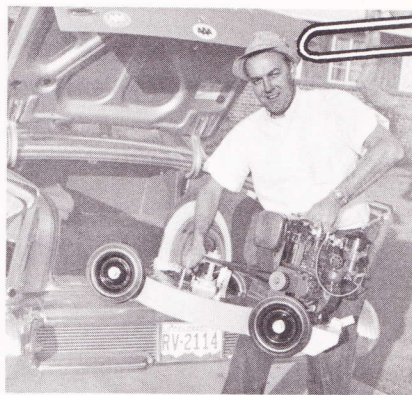


Easy in...easy out
of any car trunk
with built-on handles




Detachable handle...great
for loading and unloading

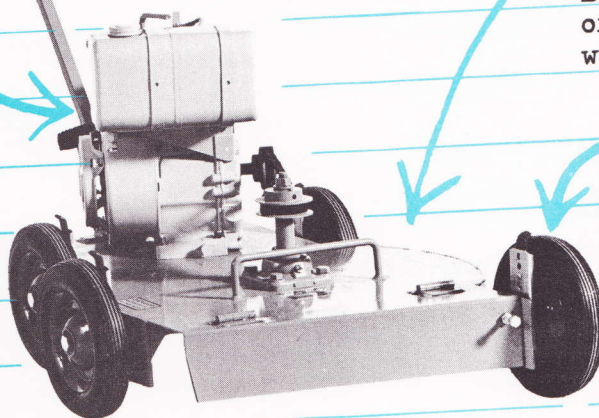

Fits even the
compact trunks.

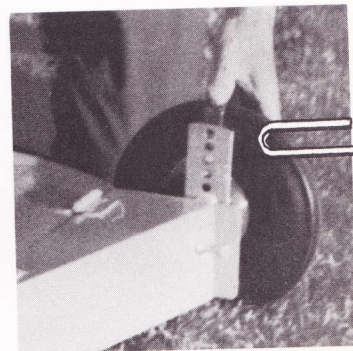

Height adjustment
at every wheel

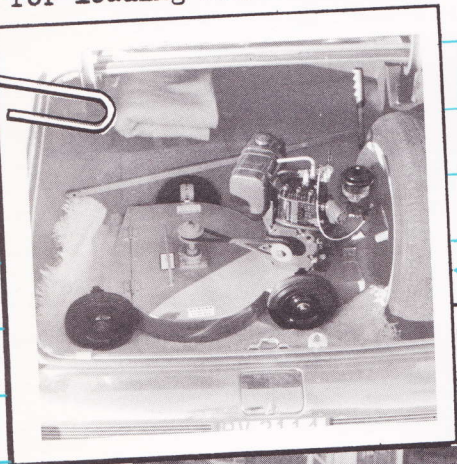

Yes, this is the one! A mower built especially for the RENTAL trade. Reinforced, all-welded steel construction...belt drive...converts from a lawn mower to a weed mower with a flick of the wrist. Positive fingertip height adjustment from 1 to 3 inches...quick detachable handle for convenience in loading.

SPECIFICATIONS

Mowing width, 19"; Blade, 1/4"x2" plow steel, reversible and hard faced for long life; Deck, 12 ga. steel, all welded and reinforced; Height adjustment, patented "S" slides provide simple, sturdy adjustment from 1" to 3"; Spindle shaft, 1" shelby tubing supported by two sealed, Fafnir flange bearings; Belt drive; Engine, Clinton 3-1/4 hp, 4 cycle, horizontal (may be purchased w/o engine); Wheels, 8x1.75, with ball bearings.

Rental Equipment Mfg. Co.

1924 SO. NAVAJO • DENVER, COLORADO

home of the famous Blue Bird LAWN COMBER

Rental Equipment Mfg. Co.

1924 SO. NAVAJO

DENVER, COLORADO

AREA 303 934-5535

LIST PRICES

"BLUE BIRD" LAWN COMBER

Model C-35	3.5 hp #494-1301-156 Clinton cast iron engine	\$224.50
Model C-45	4.5 hp #498-1301-148 Clinton cast iron engine	244.50
Model B-60	6 hp #142301 Briggs & Stratton Aluminum engine	249.50
	Lawn Comber, complete, less engine	164.50
	(Specify engine slots, Clinton or Briggs)	

"BLUE BIRD" CONVERTA-MOWER

Model M-19	3.25 hp #404-0300-155 Clinton engine	149.00
	Converta-Mower, complete, less engine	98.00

"BLUE BIRD" ROTARY WEED MOWER

Model M-24	4.5 Clinton engine	219.00
------------	--------------------	--------

PARTS FOR "BLUE BIRD" LAWN COMBER

Blades, set of 52, heat treated	\$12.00 or	.25 ea.
Blade spacers, set of 48, rubber	1.30 or	.03 ea.
Blade shaft, 1/2" x 10", drilled and heat treated, set of 4	7.20 or	1.80 ea.
Ball bearing, 3/4", for rotor shaft		4.66 ea.
Bearing stamping, inside		1.10 ea.
Bearing stamping, outside		.40 ea.
Handlegrips		.50 pr.
Handle, standard wall pipe		6.75 ea.
Rotor, shaft, steel casting only		32.00 ea.
Rotor Assembly, complete w/blades, less bearings		54.00 ea.
Throttle control assembly, complete		1.55 ea.
Tire and wheel, rear, 10 x 2.50, 5/8" bore		6.25 ea.
Tire and wheel, front, 8 x 1.75, 1/2" bore		3.25 ea.
V Belt, for Model C-35 or C-45, Gates #3360		2.16 ea.
V Belt, for Model B-60, Gates #3390		2.24 ea.
V Pulley, 3" x 3/4" bore, cast iron		2.10 ea.
V Pulley, 3" x 1" bore, cast iron		2.20 ea.
V Pulley, 6 3/4", for rotor shaft		4.75 ea.
Bushing, 3/4", for 6 3/4" V Pulley		1.70 ea.
Axle, front wheel		4.70 ea.
Crank handle, height adjustment		2.60 ea.
Plastic bellows for height adjustment crank		1.50 ea.
Rubber washers, for crank, 1/4" thick, set of 2		.20 set
--Conversion Kit, front wheels, complete		12.00 ea.
(Machines sold in 1960, 1961, 1962)		
Rubber flap, for rear, 1/4" x 7 x 21"		3.40 ea.
--Conversion Kit, tailgate, complete		7.00 ea.
(Machines sold in 1960, 1961, 1962)		

All prices F.O.B. Denver, Colorado
Prices subject to change without notice